


WAY-2-Seal

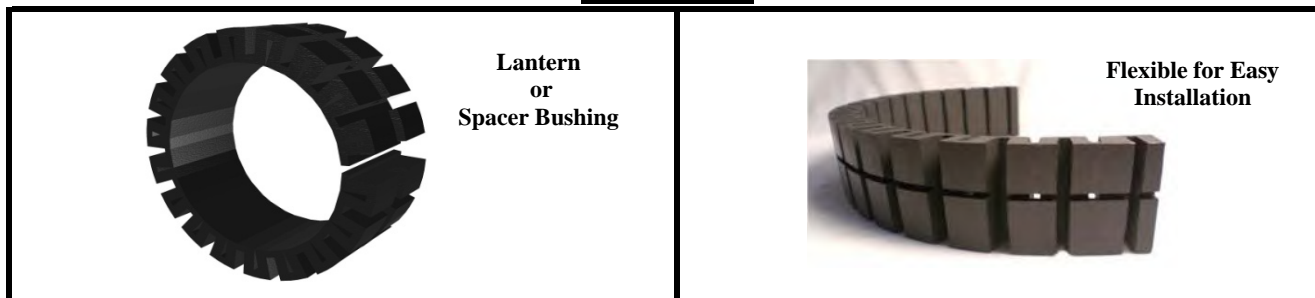

Way-2-Seal Lantern or Spacer Bushing

| | | |
|---|---------|-----------------------------------|
| MANUFACTURER OF Way-2-Seal | | Slade Inc. |
| MANUFACTURED ACCORDING TO | | Slade USA & International Patents |
| STYLE/NAME | | Way-2-Seal |
| STANDARD PACKAGING | | Lengths |
| STANDARD SHAPES | | Rectangular |
| <u>AVERAGE COMPOSITION</u> | | |
| MAIN COMPONENT | | Carbon, Graphite, PTFE |
| STATE OF MAIN COMPONENTS | | Solid |
| SPECIFIC GRAVITY | | 2.09 |
| COMPRESSIVE STRENGTH (10% deformation) | psi/bar | 1700/117 |
| COMPRESSIVE DESTRUCTIVE STRENGTH | psi/bar | > 5000/345 |
| COEFFICIENT OF FRICTION (Dry to Steel: Dynamic) | | 0.11 |
| GRAPHITE CONTENT | % Wt | <10 |
| POLYTETRAFLUOROETHYLENE CONTENT | % Wt | <80 |
| CARBON CONTENT | % Wt | <30 |

| | | |
|--|-------------------------------|-----------|
| <u>WORKING PARAMETERS</u> | | |
| MAX CONTINUOUS SERVICE TEMP | °F/°C | 500/260 |
| EMBRITTEMENT TEMP | °F/°C | -400/-240 |
| CRYSTALLINE MELT TEMP | °F/°C | 621/327 |
| THERMAL CONDUCTIVITY | BTU-in(hr/ft ² °F) | 4.5 |
| CHEMICAL RESISTANCE | pH | 0-14 |
| <i>CONTACT FACTORY for SUGGESTIONS on PARAMETERS for EACH APPLICATION</i> | | |

Slade Inc.
181 Crawford Rd * Statesville, NC 28625
tel: 704-873-1366 * fax: 704-873-1399 * website: www. Slade-inc.com

Manufacturer of 80" X 80" Gasket
Sheet, Pump Packings & Emission
Control Valve Packings

The above data, collected from in-house testing, field testing, and field applications, is subject to change without notice and must be used for examination ONLY. **Contact the factory for suggestions on each application.** Each application must be independently tested for safety and suitability. Failure to independently test can result in property damage and/or personal injury.

S:8.30.11

