


PACKING COMPRESSOR KIT

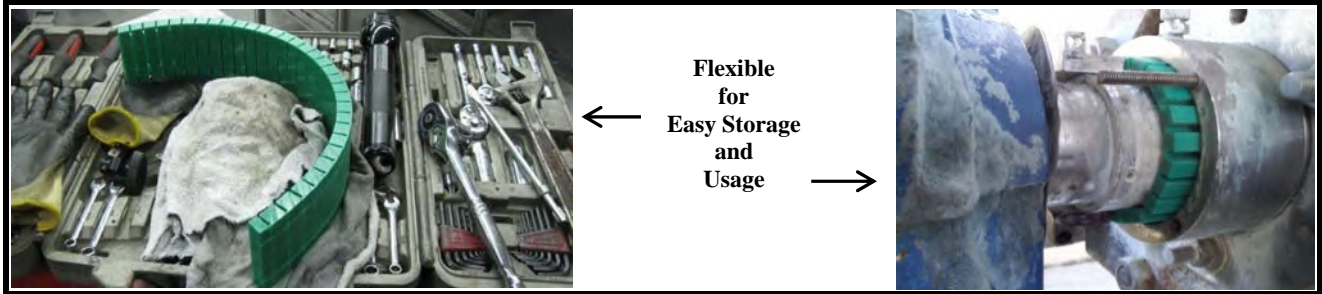

Packing Compressor Kit (PCK)

MANUFACTURER OF PCK		Slade Inc.
MANUFACTURED ACCORDING TO		Slade USA & International Patents
STYLE/NAME		PCK
STANDARD PACKAGING		Lengths
STANDARD SHAPES		Rectangular
STANDARD SIZES		1/4" to 1"
<u>AVERAGE COMPOSITION</u>		
MAIN COMPONENT		Polyethylene
STATE OF MAIN COMPONENTS		Solid
DENSITY	g/cm ³	0.93
COMPRESSIVE DESTRUCTIVE STRENGTH	psi/bar	< 5000/345
COEFFICIENT OF FRICTION (Dry to Steel: Static)		.15-.20
POLYETHYLENE CONTENT	% Wt	<100
<u>WORKING PARAMETERS</u>		
RECOMMENDED SERVICE TEMP	°F/°C	ambient
MAX CONTINUOUS SERVICE TEMP	°F/°C	180/82
CRYSTALLINE MELT TEMP	°F/°C	275/135
REMOVE the PCK before START-UP! <u>NOT</u> to be used in the stuffing box as a spacer.		

Slade Inc.
 181 Crawford Rd * Statesville, NC 28625
 tel: 704-873-1366 * fax: 704-873-1399 * website: www. Slade-inc.com

Manufacturer of 80" X 80" Gasket
 Sheet, Pump Packings & Emission
 Control Valve Packings



The above data, collected from in-house testing, field testing, and field applications, is subject to change without notice and must be used for examination ONLY. **Contact the factory for suggestions on each application.** Each application must be independently tested for safety and suitability. Failure to independently test can result in property damage and/or personal injury.

S:8.30.11