

REDUCE the number of sealing rings in the stuffing box.

REPLACE expensive mechanical seals.

AVOID dismantling the pump.



## DSS Spacer Bushings

(Rotational Pump Services)

The bushing comes ready to install: split and hinged



The DSS Spacer Bushing System enables:

- (1) Timely and simplified installation, avoiding the dismantling of the pump.
- (2) Reduction of the number of sealing rings in the stuffing box for a tighter seal.
- (3) Replacement of expensive mechanical seals.
- (4) Removal of flush water in specified applications.


Densely die formed bushing of braided graphite yarns; each yarn reinforced with 304 SS Foil.\*

\*For special services, ask for Vapor Deposited Rings or Brass Reinforced.

Contact the Factory for standard sizes.

Services (Contact Factory):  
Temperatures: up to 1400°F (760°C)  
Pressures: up to 4500 psi (310 bar)  
ph: 4-10

For flush free service, plug the flush port & remove the lantern ring

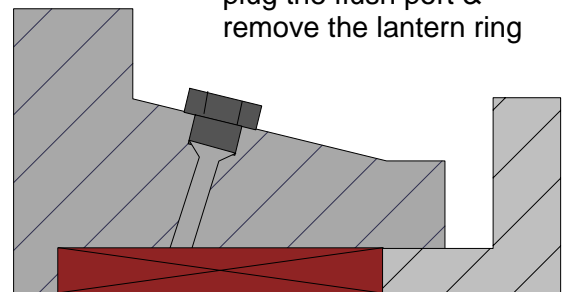

Use DSS Spacer Bushings with Slade 3300G Sealing Rings. Contact the factory for stuffing box configurations.

# SLADE

181 Crawford Road \* Statesville, NC 28625  
www.slade-inc.com \* sales@slade-inc.com  
Tel: 704-873-1366 \* Fax: 704-873-1399

Distributed by:

